



FIREMAIN
Fire Fighting Equipment and Foam Specialists

WATEROUS

5 1/4 WATEROUS CLASSIC PACER

Product Code(s): FM00132 | Hydrants | Waterous

Product Description

The Waterous Classic Pacer merges a classic look with all the traditional features of the standard Pacer design.

The Classic Pacer is rated for 250 psig and meets or exceeds all of the requirements of ANSI/AWWA C502. Its ductile iron construction assures strength and durability.

The Classic Pacer offers complete part interchangeability with the contemporary Pacer fire hydrant, that was originally introduced in 1967. The Classic Pacer has all the features you expect from a high-quality fire hydrant.

The all-bronze seat and bronze seat insert assure that the Pacer hydrant remains easy to repair.





FIREMAIN
Fire Fighting Equipment and Foam Specialists

WATEROUS

5 1/4 WATEROUS CLASSIC PACER

Product Code(s): FM00132 | Hydrants | Waterous

The epoxy primed and polyurethane top coat system on the external surfaces on the upper barrel of the Waterous Pacer fire hydrant provides a durable, high-gloss finish.

Standard Features

- New Classic Look with Time Proven Design Features
- Part Interchangeability with the Standard Pacer Design
- Ductile-Iron Nozzle Section
- Standpipes and Base
- 250 PSIG Rated Working Pressure




FIREMAIN
Fire Fighting Equipment and Foam Specialists

WATEROUS

5 1/4 WATEROUS CLASSIC PACER

Product Code(s): FM00132 | Hydrants | Waterous

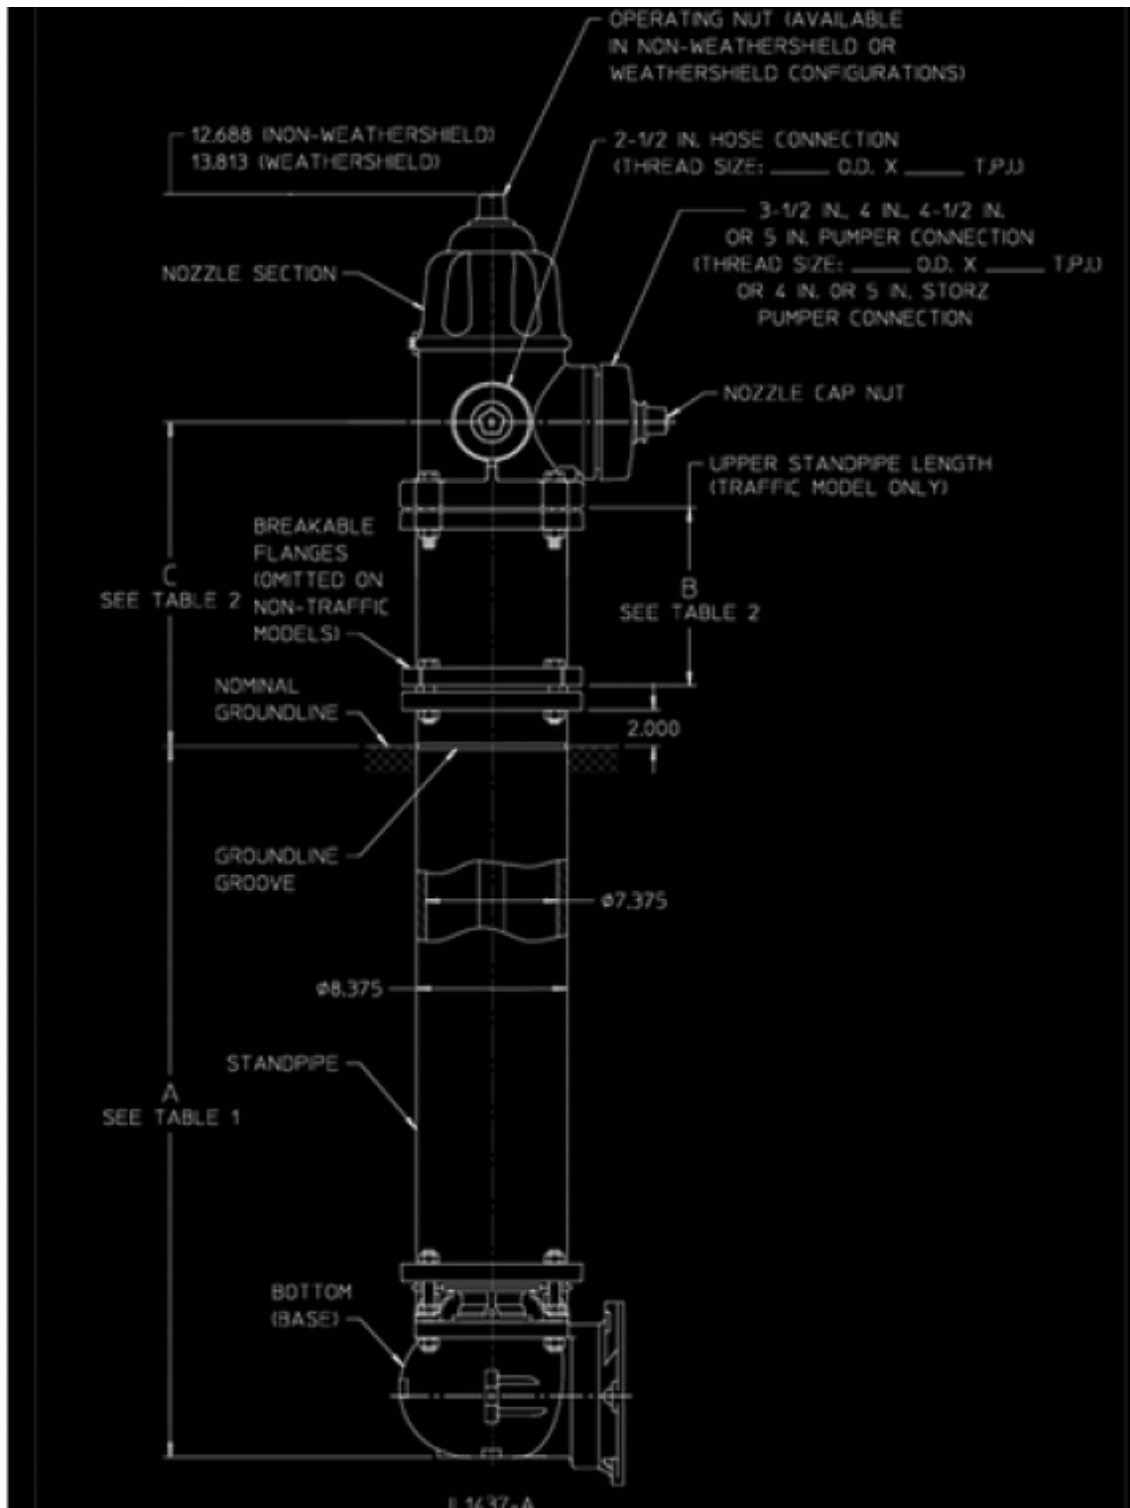



FIREMAIN
Fire Fighting Equipment and Foam Specialists

WATEROUS

5 1/4 WATEROUS CLASSIC PACER

Product Code(s): FM00132 | Hydrants | Waterous

Bury Depth ¹	DIM. A		Rod Length
	With Flanged Mech.Joint or Tyton Bottom	Traffic Model (Lower Rod Length)	Non-Traffic Model
FT - IN.	FT - IN.	FT - IN.	FT - IN.
3 - 0	3 - 0.750	2 - 9.312	4 - 6.062
3 - 6	3 - 6.750	3 - 3.312	5 - 0.062
4 - 0	4 - 0.750	3 - 9.312	5 - 6.062
4 - 6	4 - 6.750	4 - 3.312	6 - 0.062
5 - 0	5 - 0.750	4 - 9.312	6 - 6.062
5 - 6	5 - 6.750	5 - 3.312	7 - 0.062
6 - 0	6 - 0.750	5 - 9.312	7 - 6.062
6 - 6	6 - 6.750	6 - 3.312	8 - 0.062
7 - 0	7 - 0.750	6 - 9.312	8 - 6.062
7 - 6	7 - 6.750	7 - 3.312	9 - 0.062
8 - 0	8 - 0.750	7 - 9.312	9 - 6.062
8 - 6	8 - 6.750	8 - 3.312	10 - 0.062
9 - 0	9 - 0.750	8 - 9.312	10 - 6.062
9 - 6	9 - 6.750	9 - 3.312	11 - 0.062
10 - 0	10 - 0.750	9 - 9.312	11 - 6.062

¹ Bury depth is the nominal distance from groundline to bottom of connecting pipe. 1'6" through 11' 6" bury depths are available.



5 1/4 WATEROUS CLASSIC PACER


Product Code(s): FM00132 | Hydrants | Waterous

DIM. B Upper Standpipe Length (Traffic Models Only)	DIM. C Nozzle Elevation Above Groundline	
	Traffic Model (WB67-250)	Non-Traffic Model (W67-250)
10 IN.	18 IN.	18 IN.
16 IN.	24 IN.	
22 IN.	30 IN.	
28 IN.	36 IN.	
34 IN.	42 IN.	



DDP

TWO 2-1/2 IN. HOSE NOZZLES
AND ONE PUMPER NOZZLE

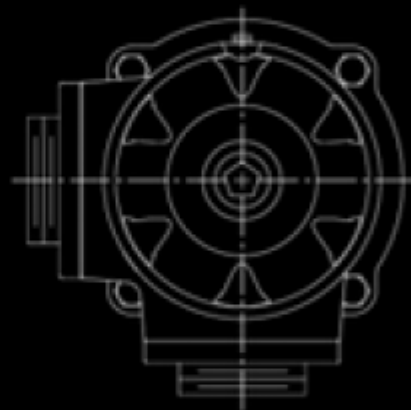

PP

TWO PUMPER NOZZLES

NOZZLE ARRANGEMENTS

NOTE: THE NOZZLE SECTION MAY BE ROTATED
IN THE FIELD TO ANY POSITION.

IL 1437-B



FIREMAIN
Fire Fighting Equipment and Foam Specialists

WATEROUS

5 1/4 WATEROUS CLASSIC PACER

Product Code(s): FM00132 | Hydrants | Waterous

BURY DEPTH (FT.-IN.)	WEIGHT (LBS.)	
	NON-TRAFFIC MODEL W67-250	TRAFFIC MODEL WB67-250
	DDP	DDP
3-0	340	369
3-6	370	389
4-0	391	410
4-6	411	430
5-0	432	451
5-6	452	470
6-0	473	492
6-6	493	512
7-0	514	533
7-6	534	553
8-0	555	574
8-6	575	594
9-0	596	615
9-6	616	635
10-0	637	656